


## Disassemble 2 inch ArtWay Extruder and attach the 1 INCH BARREL ACCESSORY



1- Unthread silver retaining ring

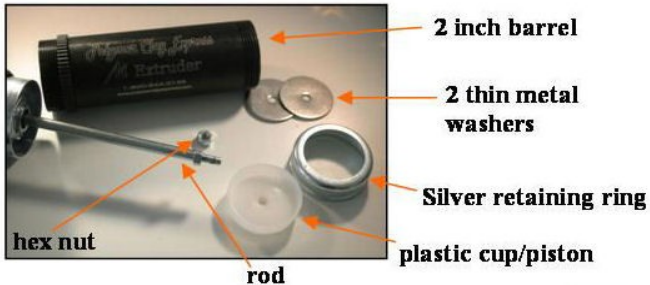

6- Remove 2 thin metal washers and set aside



2- Unthread hex nut

DO NOT remove remaining hex nut



7- Reattach the 2 inch barrel



3- HOLD STEADY bottom silver retaining ring as you unthread the 2 inch barrel

Remember to hold bottom silver retaining ring as you thread on barrel



8- Slide 1 inch accessory barrel on to rod (inside 2 inch barrel)



4- Slide 2 inch barrel over rod



9- Place small cup/piston on expose rod and thread on hex nut



5- Cup/piston is stuck inside 2 inch barrel

To remove it, pushing it sideways inside the 2 inch barrel

Lift it out



10

10- Load conditioned log of clay and place a small piece of plastic wrap on the base of log



11

11- Choose and place in a disk



12

12- Place in the large metal washer



13

13- Thread on the retaining ring