

ArtWay Tools distributed by polymerclayexpress.com

Your extruder may have blue tape or a white tag attached to the rod



This was specifically attached to the ArtWay extruder to alert the user .

Your ArtWay Extruder has extra thrust providing a stronger dispensing power in the handle
This extra thrust including your own hand strength will give you more successful dispensing.


Forcing or allowing the rod beyond these tagged areas may result in the cracking of your disk or your end cap

These tags are there to assist you, the user, to be alert to the position of the rod.

Enjoy using your **ArtWay Extruder**

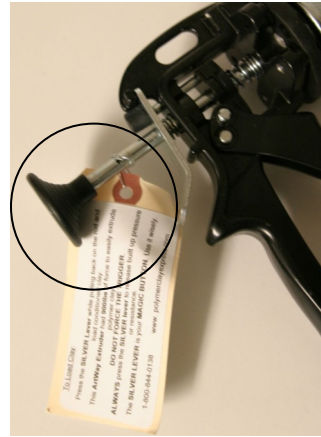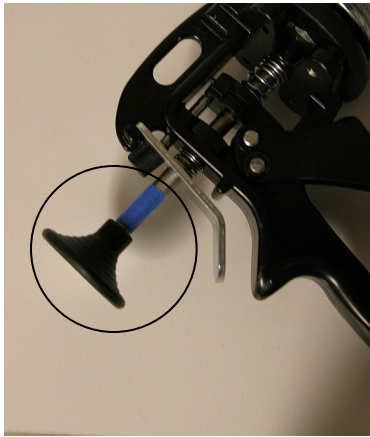


Helpful tips

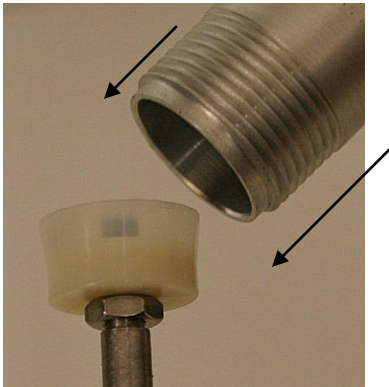

If your reassembling the extruder by placing the barrel over the piston/cup: gently but firmly push the barrel over the piston and avoid bending or damaging the wall of the piston/cup.

The piston/cup will be deliberately tight inside the barrel.

The tight fit is necessary so all your product is cleanly emptied out of the barrel as you dispense.

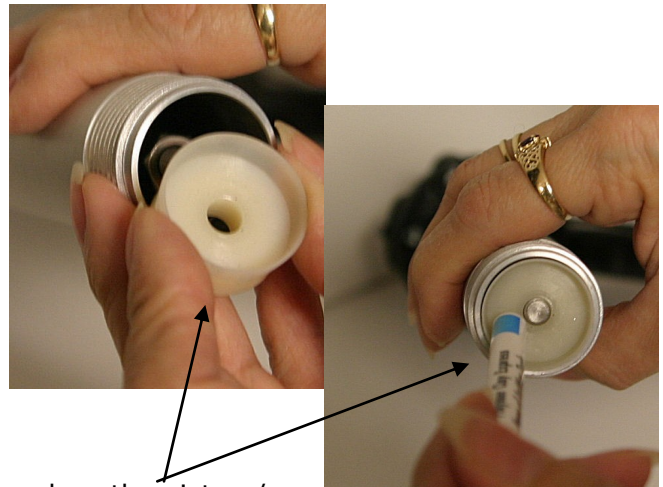

If you place the piston /cup inside the already attached barrel, the butt of a pen may be helpful to push the piston down into position.
Then thread on the hex nut.